

ICMS

*Inline Condition Monitoring Sensor
for physical fluid properties*

ICMS3-0MI

Features

- Multi-parameter monitoring:
 - Viscosity
 - Mass Density
 - Temperature
- High sensitivity and low drift
- Compact and robust design
- Easy to install
- Modbus RTU interface
- Dual programmable 4 - 20mA outputs
- High pressure option available

Applications

- Oil condition monitoring
- Fuel quality control
- Analysis of process media
- Monitoring of mixing processes



Description

The ICMS is a compact sensor for monitoring the mechanical fluid properties viscosity and mass density based on a low frequency resonant sensor element.

The outstanding performance of the ICMS is achieved by combining a patented resonator evaluation technology with a robust and reliable quartz crystal tuning fork resonator. The sensor offers a high sensitivity and long-term stability and thus is particularly suitable for oil condition monitoring in predictive maintenance programs.

Due to the high measurement rate excellent data quality can be obtained even in unsteady environmental conditions (pressure, temperature, flow).

The ICMS offers digital and configurable analog interfaces for easy and cost-effective integration into existing environments.

1 General Specifications

| Description | min | typ | max | Unit |
|-------------------------------------|--------------------|---|-----|------|
| Mechanical | | | | |
| Size (drawings see sec. 8.) | | ∅30 x 90 | | mm |
| Mass | | 150 | | g |
| Mounting | | G3/8" | | |
| Torque | 31 | | 39 | Nm |
| Operating Conditions | | | | |
| Tolerated Particle Size | | | 250 | µm |
| Oil Pressure | | | 50 | bar |
| Operating Temperature ¹ | T_{op} | | 100 | °C |
| Fluid Temperature ² | T_{fluid} | | 125 | °C |
| Flow Velocity | | | 20 | m/s |
| Supply | | | | |
| Voltage | 9 | 24 | 32 | V |
| Power Consumption | | | | |
| Analog Outputs unconnected | | 0.5 | 1 | W |
| Analog Output Driver ³ | | $(V_{supply} - V_{out}) \times I_{out}$ | 1.3 | W |
| Interfaces | | | | |
| Connector | EN 61076-2-101 | M12-8 | | |
| Analog Outputs | 2 x 4-20 mA | A-coding | | |
| Digital | Modbus RTU | | | |
| Conformity | | | | |
| CE | EN 61000-6-1/2/3/4 | | | |
| Ingress Protection (M12 mated, 24h) | DIN EN 60529 | IP67 | | |
| Compliant Fluids | | | | |
| Mineral and Synthetic Oils | | | | |
| <i>further approvals on request</i> | | | | |

¹Permissible temperature range of the sensor electronics (housing surface).

²Permissible temperature range of the liquid. Be aware that the liquid temperature influences the housing temperature and thus the operating temperature of the electronics.

³Temperature derating see Fig 4.

2 Measurement Specifications

Unless otherwise noted specifications valid at an ambient temperature of 24°C in reference liquid: Hydraulic oil HLP 32 at 40°C, laminar flow regime.

| Description | min | typ | max | Unit |
|--|-----|------|-------------------|---------------------------|
| Measurement Range ⁱ | | | | |
| Resonator Frequency | | 23 | | kHz |
| Viscosity (kinematic) ν | 1 | | 650 ⁱⁱ | cSt (=mm ² /s) |
| Viscosity (dynamic) $\eta = \nu \cdot \rho$ | | | | mPas |
| Density ρ | 0.5 | | 1.5 | g/cm ³ |
| Temperature | -40 | | 125 | °C |
| Data Rate | | 1 | | 1/s |
| Analog Output 4-20mA | | | | |
| Accuracy | | | ±1 | % FS |
| Supply Headroom $V_{\text{supply}} - V_{\text{out}}$ | 5 | | | V |
| Trueness (according to ISO 5725-1) ^{1, 2, 3} | | | | |
| Viscosity $\nu = 1$ to 300 cSt | | ±1 | ±2 | % ± 0.1 cSt |
| $\nu = 300$ to 650 cSt | | | ±5 | % |
| Density $\rho = 1$ to 300 cSt | | ±0.2 | ±1 | % |
| $\rho = 300$ to 650 cSt | | | ±2 | % |
| Temperature | | ±0.1 | ±1 | °C |
| Repeatability (relative standard deviation) ⁴ | | | | |
| Viscosity ⁵ $\nu = 50$ cSt | | 0.3 | | % |
| Density ⁵ $\rho = 50$ cSt | | 0.05 | | % |
| Temperature | | 0.02 | | °C |

Notes:

i: For applications beyond specified limits please contact MicroResonant.

ii: For firmware versions prior to 2024-06-28 this value is 400 cSt. The default range setting for the analog output is kept at 400 cSt for compatibility reasons (see Section 6).

¹Maximum permissible deviation between the measured values and reference measurements according to ASTM D7042 in a hydraulic oil HLP 32.

²In fluids with pronounced non-Newtonian behavior additional deviations have to be expected.

³Custom calibration on request.

⁴Standard deviation for 100 consecutive measurements under constant conditions, data filter disabled.

⁵See Fig. 1, 2, and 3, for information on the influence of individual parameters.

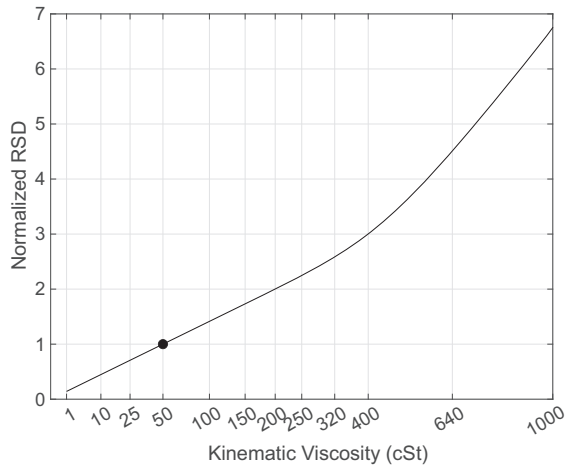


Figure 1: Normalized relative standard deviation (RSD) of viscosity as a function of viscosity. The marker refers to the values in table above.

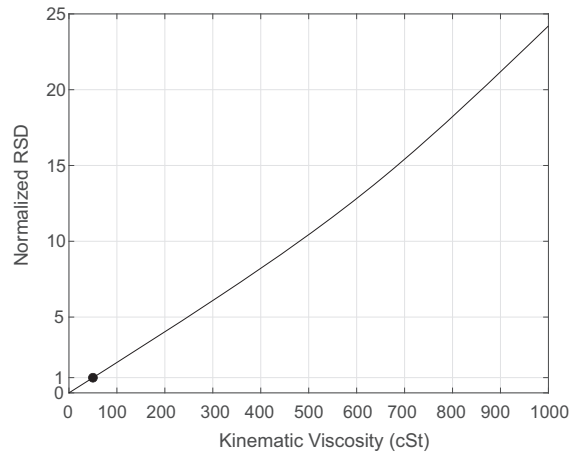


Figure 2: Normalized relative standard deviation (RSD) of density as a function of viscosity. The marker refers to the values in table above.

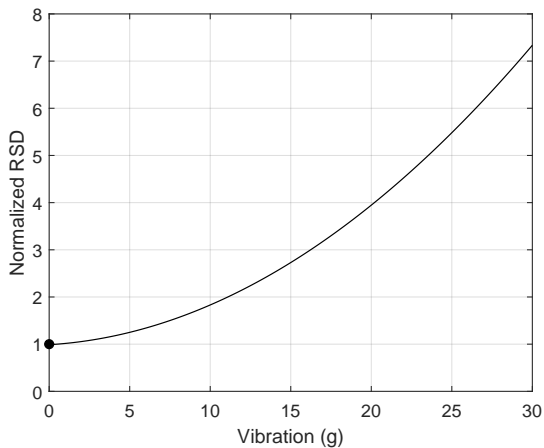


Figure 3: Normalized relative standard deviation (RSD) of viscosity and density as a function of vibration acceleration (g_{RMS} in all directions). The marker refers to the values in table above.

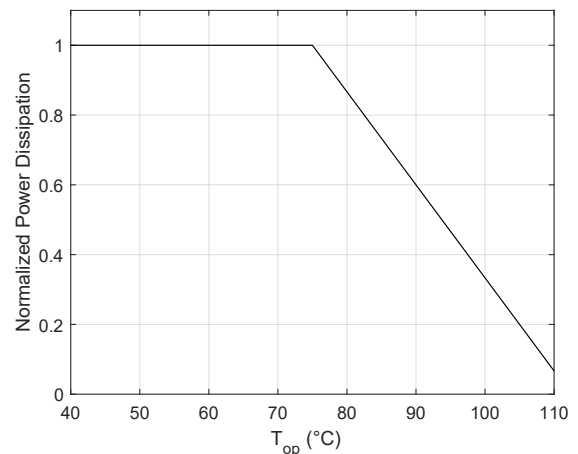


Figure 4: Derating of the power dissipation of the analog output driver.

3 Data Filter


The raw data rate of the sensor is approximately one measurement per second. In order to provide reliable low-noise results in applications with lower data rate requirements, the ICMS provides a moving average filter for all measured parameters. The length of the filter is configurable from 1 to 256 seconds through a Modbus register with a default value shown in Tab. 5. Erroneous measurements (such as e.g. out-of-range) are stored in the filter as well but discarded in the averaging process. Therefore, the output of the filter will provide valid results as long as there is valid data in the filter.

Please note that the status register information (see Sec. 5.2) corresponds to the raw (input) data of the filter. Therefore, in case the sensor is operated very close to measurement range limits, measurement noise may trigger the out-of-range bit while the average (filter output) is still within the specified range.

4 Electrical Connections

Power supply and signals share a male M12-8 connector with A-coding according to EN 61076-2-101. Install using shielded cables only.

| Pin | Signal | Notes |
|-----|------------|----------------------------------|
| 1 | OUT 2 | 4-20mA output |
| 2 | CFG reset | Connect to Ground |
| 3 | BUS H | Modbus RTU |
| 4 | Terminator | Connect to pin 3 for termination |
| 5 | BUS L | Modbus RTU |
| 6 | OUT 1 | 4-20mA output |
| 7 | +24V | Supply |
| 8 | 0V | Ground, connected to chassis |




Pin arrangement (sensor side)

CFG reset pin


The CFG reset pin can be used to reset the sensor to factory default settings. Default settings and reset procedure is outlined in Sec. 6 below. During normal operation this pin should be connected to ground.

RS-485 / Modbus RTU

The RS-485 interface requires three wires: BUS H, BUS L, and Ground. In applications where the bus ground cannot be connected to the sensor ground, an external galvanic isolator must be provided. An internal bus termination for RS-485 can be enabled by connecting pin 4 to BUS H (pin 3). To deactivate termination either connect pin 4 to BUS L (pin 5) or leave it unconnected. Any connection should be implemented as close as possible to the sensor.



RS-485 termination circuit.



RS-485 interface biasing.


As RS-485 is a half duplex bus there are conditions where there is no active transmitter on the bus. In order to avoid undefined bus states in this case, fail safe biasing is recommended to ensure $BUS\ H > BUS\ L$. Typically this is implemented at the location of the bus master. **The values of the resistors as well as the bus supply voltage VCC have to be chosen according to actual bus load / termination and the used RS485-transceiver.**

Analog Outputs

The sensor provides two independent analog current loop transmitter outputs (4-20 mA). For both outputs, the measured variable as well as the measuring range can be configured by the user (see Sec. 5.2).

By default analog output 1 is configured for temperature and analog output 2 is configured for viscosity (kinematic), with 4 mA representing the lower and 20 mA representing the high end of the measurement range. An invalid measurement result is represented by an output current of 1 mA.

Please note that each analog output driver contributes to the total power dissipation of the sensor by $(V_{\text{supply}} - V_{\text{out}}) \times I_{\text{out}}$. In order to avoid overheating the tolerated dissipation has a temperature dependent limitation as shown in Fig. 4. It is recommended to reduce the power dissipation by adding external load resistance, especially when the supply voltage is significantly higher than the output voltage of the current transmitter. Both analog outputs may be left unconnected if not used.

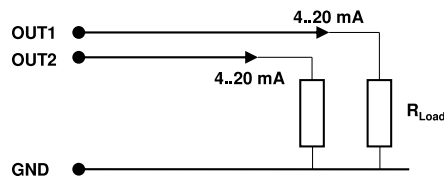

Analog outputs wiring.

5 Modbus RTU Interface

Modbus RTU over RS-485 can be used to retrieve measurement results and status information and for configuration of filter settings, analog outputs, and the Modbus interface itself. All data is organized in 16-bit registers using signed or unsigned integer values. Where necessary two registers are combined (MSB first) to represent a 32-bit integer.

The supported Modbus function codes are:

| Code | Function |
|------|----------------------------------|
| 3 | read holding registers |
| 6 | write single holding register |
| 16 | write multiple holding registers |

When communicating with the device a timeout value of at least 2 s should be used.

5.1 Modbus Register Map

| Address | | Description | Unit | size words | datatype | r/w |
|----------------------------|--------|---|------------|---------------|----------|------|
| DEC | HEX | | | | | |
| 0 | 0x0000 | General Purpose | | 1 | uint16 | rw |
| 1 | 0x0001 | HW Revision ID | | 1 | uint16 | r |
| 2 | 0x0002 | Serial Number | | 2 | uint32 | r |
| 4 | 0x0004 | Firmware Date | | 2 | uint32 | r |
| 8 | 0x0008 | Error Count | | 2 | uint32 | r |
| Measurement Results | | | | | | |
| 16 | 0x0010 | Measurement # | | 2 | uint32 | r |
| 18 | 0x0012 | kinematic Viscosity | 0.01 cSt | 1 | uint16 | r |
| 19 | 0x0013 | Density | 0.1 g/l | 1 | uint16 | r |
| 20 | 0x0014 | dynamic Viscosity ² | 0.01 mPas | 1 | uint16 | r |
| 22 | 0x0016 | Temperature | 0.01 °C | 1 | slnt16 | r |
| 23 | 0x0017 | Status Code | | 1 | uint16 | r |
| 24 | 0x0018 | kinematic Viscosity (long) | 0.001 cSt | 2 | uint32 | r |
| 26 | 0x001A | kinematic Viscosity (high range) | 0.1 cSt | 1 | uint16 | r |
| 28 | 0x001C | dynamic Viscosity (long) ² | 0.001 mPas | 2 | uint32 | r |
| 30 | 0x001E | dynamic Viscosity (high range) ² | 0.1 mPas | 1 | uint16 | r |
| Config Data Block | | | | | | |
| 32 | 0x0020 | LOCK Register | | 1 | uint16 | rw |
| 33 | 0x0021 | Command | | 1 | uint16 | r(w) |
| 34 | 0x0022 | Baud Rate | 1 Bd | 2 | uint32 | r(w) |
| 36 | 0x0024 | Address | | 1 | uint16 | r(w) |
| 37 | 0x0025 | Parity / Stop Bits ¹ | | 1 | uint16 | r(w) |
| 38 | 0x0026 | Filter Length | | 1 | uint16 | r(w) |
| 40 | 0x0028 | OUT1_select | | 1 | uint16 | r(w) |
| 41 | 0x0029 | OUT1_min | | 1 | u/slnt16 | r(w) |
| 42 | 0x002A | OUT1_max | | 1 | u/slnt16 | r(w) |
| 44 | 0x002C | OUT2_select | | 1 | uint16 | r(w) |
| 45 | 0x002D | OUT2_min | | 1 | u/slnt16 | r(w) |
| 46 | 0x002E | OUT2_max | | 1 | u/slnt16 | r(w) |

Table 1: Modbus register map.

Do **not** attempt any read or write access to Modbus registers that are not explicitly listed above as this might lead to erroneous behavior.

¹This register is available since firmware version 2023-01-11.

²This register is available since firmware version 2024-02-21.

5.2 Description of Registers

General Purpose

This is an unused register that can be used freely. The content of this register may be altered at reset.

HW Revision ID

Hardware version of the sensor.

Serial Number

Serial number of the sensor.

Firmware Date

Timestamp of the sensor firmware in UNIX time format.

Error Count

Counter for measurement errors including out-of-range events. At powerup this value is set to zero.

Measurement Results

Each measurement is assigned a consecutive number which is reset to 0 at powerup and can be read from the Modbus registers. Measurement results are scaled according to section 5.1 and encoded in signed/unsigned 16-bit integers. Invalid results are indicated by a value of 0xFFFF.

Status Code

This register is used to report measurement and error/warning conditions. Each bit that is set to 1 indicates a specific condition:

| Bit | Description | Possible Reasons |
|-------|------------------------------------|--|
| 0 | No resonance detected | Resonance search is still in progress, Liquid out of measurement range, Sensor damaged or contaminated |
| 1 | Out of range | At least one parameter is out of range |
| 2 | Frequency controller error | Viscosity or density out of range |
| 3 | Noise error | Electromagnetic interference, Very high flow velocity |
| 4 | Invalid configuration | Invalid or missing configuration |
| 5 | Resonator error | Resonator damaged |
| 6 | Temperature sensor error | Temperature sensor damaged |
| 7 | Hardware error | Damaged sensor electronics |
| 8 | Firmware error | An unspecified firmware error was triggered |
| 9 | reserved | ignore |
| 10 | Supply voltage too low or too high | Improper or unstable power supply |
| 11 | Internal temperature limit | The sensor is operated beyond the thermal specification |
| 12-15 | reserved | ignore |

Table 2: Interpretation of status code bits.

Note: If one or more of the above status code bits is set, the measurement results may be invalid or compromised.

LOCK Register

Registers of the Config Data Block are prevented from accidental write access by the LOCK register. To enable write mode for the Config Data Block (including the Command register) write 44252 (0xACDC) to the LOCK register. After the configuration is finished set the LOCK register 0 to prevent accidental damage to the configuration.

Command Register

To permanently save changes write 1 (0x0001) to the Command register. Please note that this operation may take about 1 s. When writing 255 (0x00FF) to the Command register the device is restarted.

Baud Rate

Baud rate of the Modbus interface. Accepted values are 9600, 19200, and 115200 Bd. Changes are activated after a restart.

Parity / Stop Bits

Selection of parity bit and stop bits of Modbus interface. Changes are activated after a restart.

| Value | Selection |
|-------|---------------------------|
| 0 | no parity / 1 stop bit |
| 1 | no parity / 2 stop bits |
| 2 | even parity / 1 stop bit |
| 3 | even parity / 2 stop bits |
| 4 | odd parity / 1 stop bit |
| 5 | odd parity / 2 stop bits |

Table 3: Selection of Modbus parity and stop bits.

Address

Device address of the sensor. Changes are activated after a restart.

Filter Length

Length of the moving average data filter in the range of 1 to 256.

OUTx_select

Selection of parameter that is mapped to analog output x, where x is 1 or 2.

| Value | Selection |
|-------|---|
| 0 | Output disabled |
| 18 | kinematic Viscosity |
| 19 | Density |
| 20 | dynamic Viscosity ² |
| 22 | Temperature |
| 26 | kinematic Viscosity (high range) |
| 30 | dynamic Viscosity (high range) ² |

Table 4: Selection of analog output parameter.

¹This register is available since firmware version 2023-01-11.

²This register is available since firmware version 2024-02-21.

OUT_x_min

Value that is mapped to 4 mA output current. This value must be scaled and encoded in the same way as the selected measurement parameter (see section 5.1). If the measurement result is lower than this limit, the output remains at 4 mA as long as the result is valid (saturation).

OUT_x_max

Value that is mapped to 20 mA output current. This value must be scaled and encoded in the same way as the selected measurement parameter (see section 5.1). If the measurement result is higher than this limit, the output remains at 20 mA as long as the result is valid (saturation).

By default analog outputs are configured as shown in Table 5 below. Invalid measurement results are represented by an output current of 1 mA.

From a valid analog output current I_x the associated output value OUT_x can be calculated using this formula:

$$OUT_x = \frac{I_x - 4 \text{ mA}}{16 \text{ mA}} \cdot (OUT_{x_{\max}} - OUT_{x_{\min}}) + OUT_{x_{\min}}$$

6 Default Configuration

The following table summarizes the factory default configuration:

| Parameter | Value |
|-----------------|---------------------------------------|
| Analog output 1 | Temperature -40 .. +125 °C |
| Analog output 2 | Viscosity (kinematic) 0 .. 400 cSt |
| Data filter | 60 s |
| Modbus Address | 1 |
| Baud rate | 19200 |
| Data bits | 8 |
| Parity | no |
| Stop bits | 1 |

Table 5: Factory default settings.

When communicating with the device a timeout value of at least 2 s should be used.

For changing configuration settings please refer to the procedure outlined above (LOCK and Command register). All changes to the configuration (except for the Modbus interface) are applied immediately but are only saved permanently when 1 (0x0001) is written to the command register.

Reset to default configuration

In case of misconfiguration the sensor can be reset to above factory defaults by applying the following procedure:


| Step | Action |
|------|---|
| 1 | Make sure the CFG reset pin is connected to ground. |
| 2 | Power up the sensor properly and wait at least 5 seconds. |
| 3 | Connect the CFG pin to the supply voltage (nominal +24 VDC) |
| 4 | Wait at least for 10 seconds. |
| 5 | Connect the CFG reset pin to ground again. |
| 6 | Power cycle the sensor. |
| 7 | The sensor will start with factory default configuration. |

Table 6: Reset factory default procedure.

7 Mounting and Handling

The sensor element of the ICMS is a quartz crystal tuning fork resonator. To protect this resonator from mechanical impacts, the sensor features a permanent protective cap. The liquid can enter this cap through an opening at the tip and leave through openings at the side.

It is recommended to mount the sensor in a T-fitting (inlet opposite to the sensor and outlet to the side) or a similar setup. For sealing we recommend a bonded seal washer; Torque required for these washers typically is the range of 31 – 39 Nm.

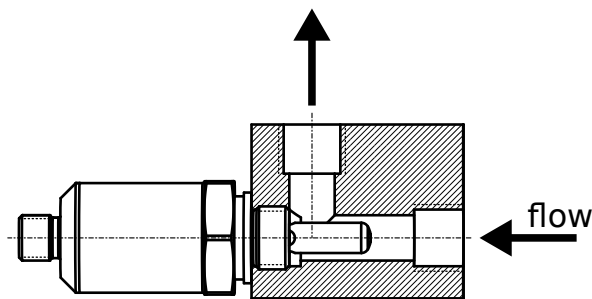

Recommended mounting orientation.

The sensor element of the ICMS is virtually insensitive to mounting orientation, flow direction or pressure. Nevertheless, for optimal performance we recommend considering a few details:


- Air bubbles change the mechanical properties of a liquid and thus influence the measurement. Make sure no air pockets can get trapped at the sensor and potential bubbles are carried away from the sensor by flow or buoyancy. Avoid feeding oil with entrained air to the sensor and be aware that dissolved gases in the oil may form bubbles when pressure is reduced.
- When placing the sensor in a reservoir or a sump the flow rate may be very low. This may lead to extremely slow reaction of the sensor, to residuals influencing the measurement, or even clogging the sensor.
- Although the sensor element itself is virtually insensitive to pressure, the viscosity of oil is a function of pressure. The effect of pressure fluctuation on the measurements are generally more pronounced at higher pressure.
- Consider the heat transfer from the liquid to the sensor case when operating at high liquid temperature.
- Laminar flow is required in the vicinity of the sensor. Turbulence is a source of high acoustic energy and can therefore increase the noise of the measurement results or temporarily interrupt the measurement.

If cleaning of the sensor is necessary use suitable solvents (e.g. white spirit or alcohol).

Do not

- use compressed air as this may damage the resonator permanently due to high flow velocity.
- penetrate the protective cap with any kind of object (e.g. needles or wires).

8 Dimensions

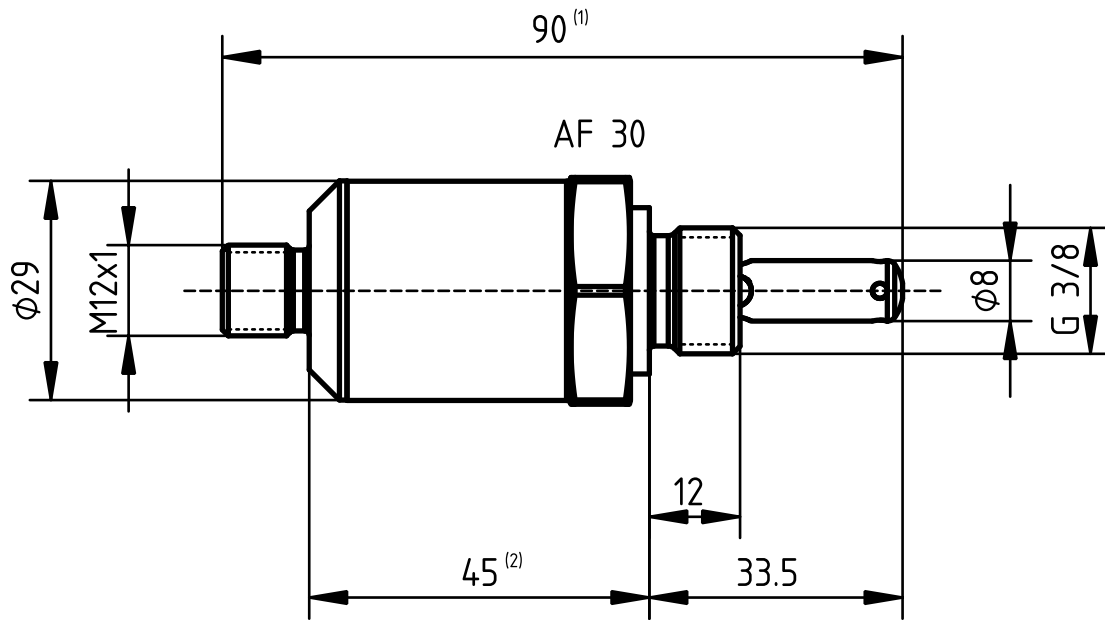

All dimensions in mm, drawing is probably not to scale.

Revision History

| | |
|---------|---|
| 08/2024 | Measurement range extended AOUT swap corrected |
| 05/2024 | Specification extended |
| 04/2024 | Register table extended |
| 12/2023 | Bus specification extended |
| 02/2022 | Initial release |

Micro Resonant Technologies GmbH
A-4040 Linz, Austria
office@micro-resonant.at

Specifications subject to change without notice.

¹For hardware revisions 0 and 1 this dimension is 93.4 mm.

²For hardware revisions 0 and 1 this dimension is 48.9 mm.